




TYPE A
without flange rings



TYPE B
2 flange rings
+ 2 snap rings




TYPE C
2 BRL snap rings




TYPE D
2 flange rings

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
 ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
 AND FOR DIFFERENT DIMENSIONS OR TYPES.


d	Dr	B	J	X	R min.	r min.	BASIC DYNAMIC RADIAL LOAD RATING Cr kN	BASIC STATIC RADIAL LOAD RATING Cor kN	TYPE	P / N
15	27,116	14,0	22,20	8,0	1,8	0,3	18,0	19,4	C	2671
17	28,360	19,0	23,70	13,0	2,0	0,3	27,0	33,0	B	2662
18	30,470	20,0	25,00	13,0	2,0	0,3	28,5	33,6	B	2663
18	30,520	13,0	25,15	8,0	2,0	0,5	19,9	21,2	B	2181
19	33,829	19,0	28,00	15,0	2,0	0,3	37,8	46,5	A	2522
20	33,830	18,0	27,80	10,0	2,6	0,3	27,0	30,1	B	2654
20	33,850	20,0	28,60	13,0	2,5	0,3	31,9	37,3	B	2664
20	33,900	16,0	28,60	10,0	2,6	0,7	27,0	30,0	B	2486
20	35,500	14,0	29,50	8,0	1,5	0,2	23,2	25,2	C	2512
20	36,810	16,0	28,60	9,0	2,6	0,7	27,5	27,9	A	2165
20	36,810	16,0	28,60	9,0	2,6	0,7	27,5	27,9	B	2829
20	40,700	19,0	31,40	12,0	0,6	0,6	40,0	41,0	A	2725
22	34,720	23,0	29,80	16,0	2,5	0,3	37,0	54,0	B	2665
24	38,610	23,0	32,50	16,0	2,5	0,3	42,7	56,6	B	2666
24	38,610	25,0	32,50	18,0	2,5	0,3	47,2	64,5	B	2775
24	40,167	24,0	34,20	19,8	2,5	0,3	54,6	78,9	A	2523
25	42,510	12,0	34,80	6,0	2,6	0,3	21,9	21,8	C	2625 - 2794

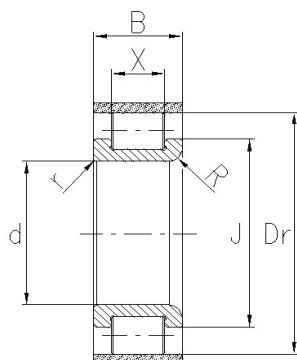


TYPE A
without flange rings



TYPE B
2 flange rings
+ 2 snap rings




TYPE C
2 BRL snap rings




TYPE D
2 flange rings

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
AND FOR DIFFERENT DIMENSIONS OR TYPES.


d	Dr	B	J	X	R min.	r min.	BASIC DYNAMIC RADIAL LOAD RATING Cr kN	BASIC STATIC RADIAL LOAD RATING Cor kN	TYPE	P / N
25	42,510	16,0	34,80	9,0	0,6	0,6	31,0	32,0	A	2900 - 2901
25	42,510	16,0	34,80	9,0	2,5	0,5	31,2	34,4	B	2404
25	42,510	16,0	34,80	9,0	2,5	0,5	31,2	34,4	C	2889
25	46,520	18,0	35,80	12,0	3,0	0,5	45,0	48,1	B	2193
25	46,520	18,0	35,80	12,0	3,0	0,5	45,0	48,1	A	2678
25	46,520	18,0	35,80	12,0	3,0	0,5	45,0	48,1	C	2767 - 2795
25	46,520	22,0	35,20	16,0	0,6	0,6	57,5	63,5	A	2785
25	53,550	28,0	37,40	19,0	0,6	0,6	76,3	77,5	A	2726
27	41,800	25,0	35,80	18,0	2,5	0,3	50,0	71,7	B	2667
30	49,600	19,0	40,30	10,0	3,5	0,5	40,2	44,9	B	2405
30	49,600	19,0	40,30	10,0	1,0	1,0	40,2	44,9	B	2848
30	50,740	14,0	40,15	7,5	3,0	0,3	32,6	32,9	C	2529
30	54,001	31,0	44,80	25,0	3,0	0,3	91,6	133,2	A	2524
30	55,190	20,0	42,50	14,0	1,0	1,0	60,8	66,3	A	2677
30	55,190	20,0	42,50	14,0	1,0	1,0	61,0	66,0	B	2830
30	55,190	20,0	42,50	14,0	2,5	0,5	61,0	66,0	B	2855
30	68,150	31,5	46,50	22,0	1,0	1,0	111,0	114,0	A	2842

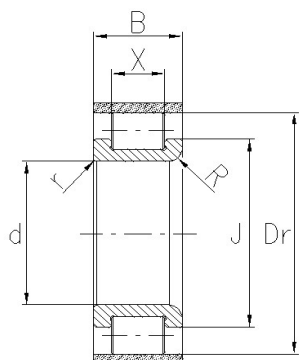


TYPE A
without flange rings



TYPE B
2 flange rings
+ 2 snap rings




TYPE C
2 BRL snap rings




TYPE D
2 flange rings

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
 ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
 AND FOR DIFFERENT DIMENSIONS OR TYPES.


d	Dr	B	J	X	R min.	r min.	BASIC DYNAMIC RADIAL LOAD RATING Cr kN	BASIC STATIC RADIAL LOAD RATING Cor kN	TYPE	P / N
35	63,970	23,0	47,50	15,0	1,1	1,1	76,0	80,5	A	2676
35	63,970	23,0	47,50	15,0	1,1	1,1	76,0	80,5	B	2832
35	67,500	21,0	51,50	13,0	3,0	0,3	70,9	74,8	B	2894
35	73,020	35,0	49,70	26,0	1,1	1,1	136,7	145,6	A	2707
38	54,690	20,0	49,50	12,0	4,0	0,1	46,8	67,4	B	2503
40	67,650	27,0	53,00	20,0	2,6	0,3	100,0	124,0	D	2728
40	81,400	37,5	60,40	28,0	1,0	1,0	163,0	196,0	A	2843
45	74,430	23,0	57,80	15,0	1,1	1,1	88,0	96,0	A	2904
45	81,200	30,0	63,50	18,0	3,0	0,3	111,5	133,6	B	2895
50	72,000	31,0	62,00	24,0	4,0	0,3	112,0	172,5	A	2645
50	81,400	24,0	64,40	16,0	3,5	0,3	99,3	122,5	B	2850
50	81,700	34,0	66,60	26,0	1,5	1,5	147,8	204,4	A	2704
50	109,270	50,0	70,90	36,0	1,0	1,0	270,0	287,0	A	2790
55	88,810	25,0	70,80	18,0	1,5	1,5	120,2	151,5	A	2679
60	86,740	26,00	72,00	17,0	1,1	1,1	106,5	146,9	A	2626
60	99,170	28,0	77,20	20,0	1,5	1,5	148,0	184,0	A	2813
60	99,170	30,0	77,20	22,0	4,5	0,3	160,1	203,4	B	2852

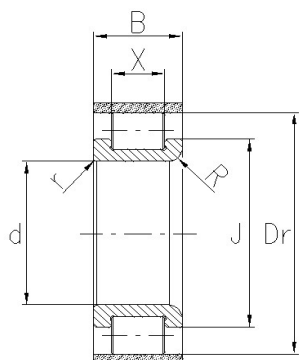

TYPE A
without flange rings



TYPE B
2 flange rings
+ 2 snap rings



TYPE C
2 BRL snap rings



TYPE D
2 flange rings

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
AND FOR DIFFERENT DIMENSIONS OR TYPES.

d	Dr	B	J	X	R min.	r min.	BASIC DYNAMIC RADIAL LOAD RATING Cr kN	BASIC STATIC RADIAL LOAD RATING Cor kN	TYPE	P / N
65	93,090	26,0	78,50	17,0	1,1	1,1	112,1	161,0	A	2646
65	99,000	35,4	82,50	25,0	4,3	1,0	166,0	254,0	A	2879
65	120,970	60,0	85,80	44,0	1,5	1,5	370,0	447,0	A	2727
70	100,280	30,0	81,50	18,0	1,1	1,1	132,1	178,4	A	2627
75	107,900	30,0	89,20	18,0	1,1	1,1	140,0	196,0	A	2578
75	107,900	30,0	89,20	18,0	3,5	1,5	140,0	196,0	A	2684
75	143,220	55,0	102,00	40,0	2,1	2,1	395,1	476,1	A	2897
85	121,440	34,0	100,00	20,0	1,1	1,1	173,5	241,5	A	2661
85	133,210	36,0	104,50	26,0	2,0	2,0	247,7	328,8	A	2675
90	130,110	37,0	106,80	22,0	1,5	1,5	208,0	286,0	A	2628
90	130,110	37,0	106,80	22,0	1,5	1,5	208,0	286,0	D	2808
90	176,210	80,0	122,00	55,0	2,0	2,0	638,0	785,0	A	2791
100	139,650	37,0	116,40	22,0	1,5	1,5	212,6	314,0	A	2653
130	207,120	64,0	162,30	44,0	3,0	3,0	620,0	875,0	A	2768
140	264,447	102,0	186,00	70,0	4,0	4,0	1190,0	1555,0	A	2680
325	383,420	43,0	351,50	30,0	3,5	2,1	585,0	1355,0	A	2787
375	444,820	48,0	406,50	36,0	3,5	2,1	805,0	1185,0	A	2788




Technical drawing of a shaft-hub assembly. The drawing shows a shaft of diameter d inserted into a hub of inner diameter J and outer diameter Dr . The total width of the assembly is B , and the width of the shaft is X . The drawing also shows the angles α and β at the top and bottom of the shaft-hub interface.


A technical drawing of a rectangular container, likely a box or a small tank, shown in a cross-sectional view. The drawing is oriented vertically. It features a central rectangular cavity. The top and bottom of the container are reinforced with a thick, hatched material, possibly a lid and a base. A dashed horizontal line runs through the center of the container, indicating its vertical axis of symmetry. The drawing is a black and white line drawing with hatching used to indicate different materials or sections.

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
AND FOR DIFFERENT DIMENSIONS OR TYPES.


CPM S.p.A. - ITALY - 20834 NOVA MILANESE (MB)
Via Brodolini, 26 - Tel. 0039 0362 363411 r.a. - Fax 0039 0362 366421 - info@cpmbearings.com
www.cpmbearings.com

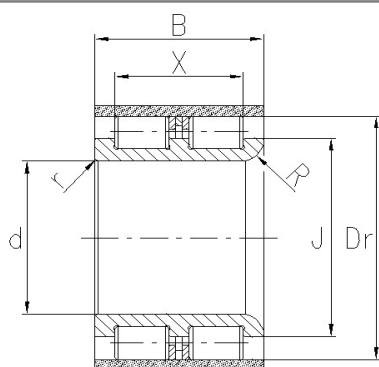


TYPE A
2 flange rings
+ 1 snap ring



TYPE B
without flange rings




TYPE C
1 side ring




TYPE D
2 side rings

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
 ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
 AND FOR DIFFERENT DIMENSIONS OR TYPES.


d	Dr	B	J	X	R min.	r min.	BASIC DYNAMIC RADIAL LOAD RATING Cr kN	BASIC STATIC RADIAL LOAD RATING Cor kN	TYPE	P / N
18	32,300	20,5	25,9	14,9	2,0	0,3	24,1	25,7	A	2699
22	36,200	30,0	30,8	23,0	2,5	0,7	47,5	68,8	A	2435
22	38,750	22,5	31,0	17,3	2,0	0,3	34,6	38,1	A	2535 - 2834
24	40,250	26,0	34,3	20,0	2,5	0,3	44,0	59,8	A	2400
24	40,250	34,0	34,3	24,0	2,0	2,0	53,3	76,4	A	2597
25	40,250	26,0	34,3	20,0	2,5	0,3	44,0	59,8	A	2686
25	40,250	32,0	34,3	24,0	3,0	0,3	53,3	76,4	A	2613
28	39,850	25,0	35,0/37,8	18,0	3,5	0,3	36,9	56,0	A	2908
28	43,350	26,5	37,3	20,0	3,0	0,3	46,6	66,1	A	2519
28	43,350	26,5	37,3	20,0	3,0	0,3	53,0	66,1	A	2883
28	44,450	34,0	36,5	27,6	2,5	0,3	70,8	99,8	A	2776
30	46,400	32,0	38,7	27,6	2,0	0,3	73,2	105,7	A	2594
30	48,250	40,0	40,6	32,0	2,5	2,5	85,8	131,6	A	2687
30	49,600	26,0	38,6	20,0	3,0	0,3	57,0	70,3	D	2510
30	49,600	24,0	40,0	18,0	3,0	0,3	50,8	60,6	A	2178
30	49,600	25,0	40,0	18,9	3,0	0,3	50,8	60,6	A	2651
30	49,600	26,0	40,0	20,0	3,0	0,3	57,1	70,4	A	2198

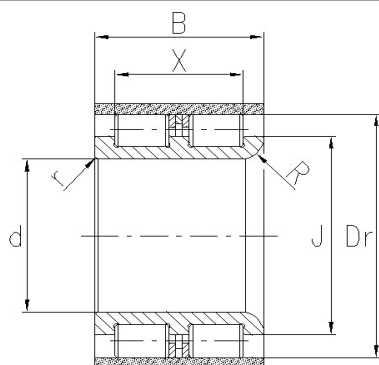


TYPE A
2 flange rings
+ 1 snap ring



TYPE B
without flange rings




TYPE C
1 side ring




TYPE D
2 side rings

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
 ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
 AND FOR DIFFERENT DIMENSIONS OR TYPES.


d	Dr	B	J	X	R min.	r min.	BASIC DYNAMIC RADIAL LOAD RATING Cr kN	BASIC STATIC RADIAL LOAD RATING Cor kN	TYPE	P / N
30	49,600	30,0	40,0	24,0	2,6	0,3	69,1	90,0	A	2683
30	49,600	34,0	40,0	24,9	1,0	1,0	69,0	89,9	A	2872
30	49,600	34,0	40,0	26,0	1,0	1,0	69,0	89,9	D	2858
32	46,600	25,0	41,0	20,5	3,0	0,3	54,3	82,5	D	2508
32	46,600	28,0	41,0	22,0	3,0	0,3	54,3	82,5	A	2183 - 2439
32	48,240	34,0	41,0	27,6	2,5	0,3	76,0	112,0	A	2668
32	51,750	25,0	42,5	19,9	3,0	0,3	59,1	74,7	A	2496
32	51,750	29,0	42,5	24,0	3,0	0,3	71,5	95,5	A	2579
34	50,200	29,0	42,5	23,6	2,5	0,3	66,7	96,6	A	2634
35	49,800	28,0	43,9	22,0	3,0	0,3	56,8	89,7	A	2434
35	52,090	26,5	44,5	20,9	2,5	0,3	56,6	79,4	A	2488 - 2723
35	52,090	26,5	44,5	21,2	2,5	0,3	63,0	90,0	A	2885
35	55,520	36,0	45,0	28,0	0,6	0,6	83,6	113,6	B	2470
35	55,520	36,0	45,0	28,0	0,6	0,6	83,6	113,6	A	2520
35	55,520	36,0	45,0	28,0	2,5	0,3	83,6	113,6	A	2706
35	59,190	27,0	48,2	21,3	3,0	0,3	68,4	85,5	A	2721
35	64,300	26,5	52,9	20,9	2,5	0,3	72,9	95,7	A	2528

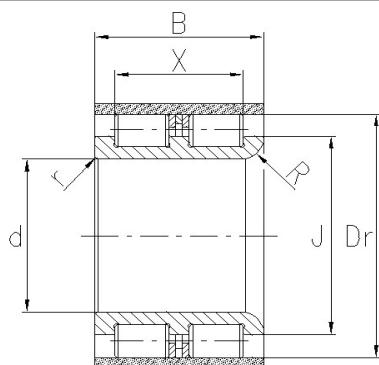


TYPE A
2 flange rings
+ 1 snap ring



TYPE B
without flange rings




TYPE C
1 side ring




TYPE D
2 side rings

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
 ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
 AND FOR DIFFERENT DIMENSIONS OR TYPES.


d	Dr	B	J	X	R min.	r min.	BASIC DYNAMIC RADIAL LOAD RATING Cr kN	BASIC STATIC RADIAL LOAD RATING Cor kN	TYPE	P / N
37	50,490	30,0	45,2	23,9	3,0	0,1	60,1	105,1	A	2863
38	52,950	28,0	47,0	22,0	3,0	0,3	59,2	97,0	A	2164
38	52,950	29,5	47,5	21,9	3,2	0,1	59,2	97,0	A	2504
38	52,950	29,5	47,5/48,5	21,9	3,7	0,1	59,2	97,0	A	2806
38	54,686	29,5	49,5	20,7	4,0	0,1	56,9	86,7	A	2464
38	54,690	29,5	49,2	21,6	4,0	0,1	63,0	99,0	A	2458
38	57,910	38,0	48,0	32,0	3,0	0,3	106,0	156,0	A	2669
40	57,810	34,0	50,0	28,0	3,2	0,3	86,1	141,2	A	2168
40	57,810	34,0	50,0	28,0	3,2	0,3	96,0	141,0	A	2827
40	60,680	31,0	51,4	25,6	3,2	0,3	80,8	118,1	D	2729
40	61,740	28,0	50,2	20,9	3,0	0,3	70,6	90,6	A	2179
40	61,740	28,0	50,2	20,9	3,0	0,3	70,6	90,6	C	2188
40	61,740	32,0	50,2	24,9	3,0	0,3	85,4	115,8	A	2180
40	61,740	35,5	50,2	27,6	2,6	0,3	100,0	140,0	A	2650
40	61,740	38,0	50,2	30,0	1,1	1,1	100,0	141,0	C	2506
40	75,630	78,0	56,0	61,1	1,1	1,1	243,2	337,2	D	2567
42	60,750	37,0	51,5	30,9	3,0	0,3	100,7	156,9	A	2412

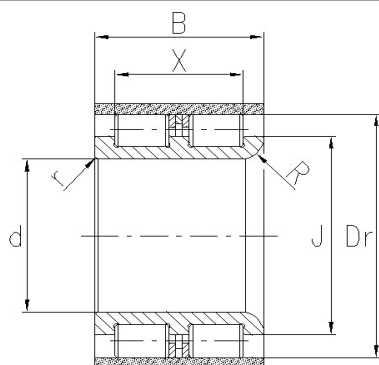


TYPE A
2 flange rings
+ 1 snap ring



TYPE B
without flange rings




TYPE C
1 side ring




TYPE D
2 side rings

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
 ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
 AND FOR DIFFERENT DIMENSIONS OR TYPES.


d	Dr	B	J	X	R min.	r min.	BASIC DYNAMIC RADIAL LOAD RATING Cr kN	BASIC STATIC RADIAL LOAD RATING Cor kN	TYPE	P / N
42	60,750	37,0	51,5	31,6	3,0	0,3	107,2	169,7	A	2777
44	61,600	34,0	53,9	28,0	3,2	0,3	90,1	153,0	A	2592
44	62,970	37,0	53,4	30,9	2,5	0,3	103,5	164,4	A	2401
45	61,550	32,0	53,8	24,9	3,0	0,3	77,3	125,7	A	2559
45	61,550	36,0	53,9	28,9	3,0	0,3	90,0	153,0	A	2425
45	65,020	34,0	54,5	27,3	3,0	0,3	94,3	140,4	A	2647
45	66,850	37,5	55,8	28,6	3,5	0,3	105,8	156,7	A	2419 - 2722
45	66,850	37,5	55,8	28,6	3,5	0,3	123,0	157,0	A	2828
45	83,880	85,0	64,2	64,7	1,1	1,1	268,0	393,9	D	2619
46	69,500	45,0	56,5	37,3	3,2	0,3	145,0	207,0	A	2807
50	67,280	32,0	61,0	25,8	3,2	0,3	75,7	145,2	A	2530
50	67,360	40,0	60,4	32,6	4,0	1,0	109,0	201,0	A	2720
50	69,580	40,0	60,3	33,3	3,0	0,3	118,0	202,0	B	2719
50	69,670	32,0	60,3	24,9	3,0	0,3	89,1	141,0	A	2492
50	69,670	37,5	60,3	31,4	2,5	0,3	111,2	186,9	A	2609
50	69,670	42,5	60,3/65,0	33,4	6,0	0,3	118,0	202,0	A	2590
50	72,000	31,0	62,0	24,0	4,0	0,3	111,8	172,5	B	2645

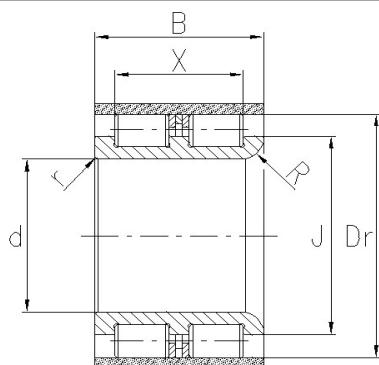


TYPE A
2 flange rings
+ 1 snap ring



TYPE B
without flange rings




TYPE C
1 side ring




TYPE D
2 side rings

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
 ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
 AND FOR DIFFERENT DIMENSIONS OR TYPES.


d	Dr	B	J	X	R min.	r min.	BASIC DYNAMIC RADIAL LOAD RATING Cr kN	BASIC STATIC RADIAL LOAD RATING Cor kN	TYPE	P / N
50	72,050	37,0	61,8	28,5	4,0	0,1	111,7	172,5	A	2466
50	72,330	39,0	59,0	32,4	3,2	0,3	130,9	194,3	A	2518
50	72,330	39,0	59,0	32,4	3,0	0,3	151,0	194,0	A	2884
50	72,330	40,0	59,0	33,1	1,1	1,1	130,9	194,3	C	2190 - 2465
50	72,330	40,0	59,0	33,1	1,1	1,1	130,9	194,3	A	2432 - 2596
50	72,330	40,0	59,0	33,1	1,5	1,5	130,9	194,3	D	2857
50	75,250	40,0	62,0	32,5	2,5	1,0	135,0	204,6	A	2649
50	75,250	40,0	62,0	32,5	2,5	1,0	135,0	204,6	D	2849
50	81,450	32,0	65,0	26,1	3,0	0,3	124,2	163,4	A	2798
55	76,940	40,0	66,0	31,1	3,0	0,3	125,0	205,0	A	2698
55	77,070	41,0	66,0	33,8	3,0	0,3	133,4	221,8	A	2593
55	83,540	46,0	68,5	39,0	1,5	1,5	177,5	279,8	B	2906
55	83,540	46,0	68,5	39,0	1,1	1,1	177,5	279,8	C	2191 - 2444
55	83,540	47,0	68,5	40,1	3,5	1,1	177,5	279,8	A	2509-2685-2819
55	85,070	41,0	66,0	33,8	3,0	0,3	161,0	218,0	A	2731
55	94,760	100,0	73,4	76,7	1,1	1,1	321,5	491,3	D	2620 - 2865
55	88,850	52,0	72,5	42,1	6,2	0,5	206,0	303,0	A	2558 - 2674

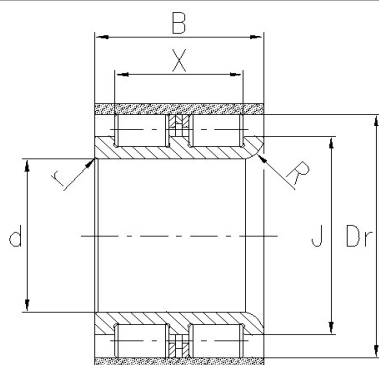


TYPE A
2 flange rings
+ 1 snap ring



TYPE B
without flange rings




TYPE C
1 side ring




TYPE D
2 side rings

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
AND FOR DIFFERENT DIMENSIONS OR TYPES.


d	Dr	B	J	X	R min.	r min.	BASIC DYNAMIC RADIAL LOAD RATING Cr kN	BASIC STATIC RADIAL LOAD RATING Cor kN	TYPE	P / N
55	85,070	41,0	66,0	33,8	3,0	0,3	161,0	218,0	D	2851
55	89,935	52,0	72,7	41,1	1,1	1,1	197,0	293,0	A	2844
60	83,830	46,0	71,0	39,8	2,5	0,3	171,7	289,8	A	2532 - 2724
60	83,830	46,0	71,0	39,8	2,5	0,3	171,7	289,8	B	2820
60	83,830	47,0	71,0	39,8	2,5	0,3	171,7	289,8	A	2495 - 2566
60	83,830	50,0	71,0/76,5	39,8	6,3	0,3	171,7	289,8	A	2821
60	83,830	65,0	71,0/76,5	53,8	6,3	0,3	219,9	398,5	A	2805
60	89,870	52,0	76,0	44,6	4,0	0,3	200,0	327,0	A	2878
60	89,800	52,0	72,6	42,6	4,0	0,3	206,1	311,0	A	2799
65	89,800	48,0	78,5	40,6	4,0	0,3	173,5	329,3	A	2656
65	89,800	48,0	78,5	40,5	4,0	0,3	173,5	329,3	A	2862
65	93,090	46,0	78,5	39,0	4,0	1,1	192,3	322,0	D	2652-2783-2816
65	93,100	58,0	78,5	49,6	3,5	0,3	237,6	422,7	A	2527
65	109,660	110,0	83,0	83,7	1,5	1,5	442,1	677,0	D	2617 - 2866
65	109,660	110,0	83,0	83,7	1,5	1,5	442,1	677,0	D	2866
70	95,290	54,0	82,2	43,6	4,0	1,0	197,0	362,0	A	2700 - 2702
70	100,280	54,0	81,5	42,0	1,1	1,1	226,0	357,0	C	2507

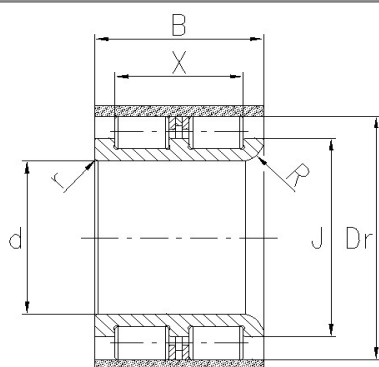


TYPE A
2 flange rings
+ 1 snap ring



TYPE B
without flange rings



TYPE C
1 side ring



TYPE D
2 side rings

DO NOT USE THESE DRAFT DRAWINGS TO ORDER BEARINGS.
 ASK CPM TECHNICAL SERVICE FOR DETAILED DRAWINGS
 AND FOR DIFFERENT DIMENSIONS OR TYPES.

d	Dr	B	J	X	R min.	r min.	BASIC DYNAMIC RADIAL LOAD RATING Cr kN	BASIC STATIC RADIAL LOAD RATING Cor kN	TYPE	P / N
75	115,780	62,0	92,5	52,0	3,5	1,5	317,0	491,0	D	2893
75	115,780	31x2	92,5	53,0	3,5	1,5	317,0	491,0	A	2735
75	127,550	120,0	98,7	90,6	2,0	2,0	534,0	870,0	D	2640
80	99,930	52,9	91,2	44,0	4,0	0,5	169,0	388,0	A	2880
80	111,760	62,0	93,0	52,0	4,0	1,0	290,0	505,0	A	2703
80	112,750	60,0	93,1	50,0	1,1	1,1	274,0	449,0	A	2610
80	112,750	60,0	93,1	50,1	1,5	1,5	274,0	449,0	D	2854
80	122,100	70,0	96,0	60,0	4,2	0,3	377,0	583,0	A	2657
80	141,920	130,0	106,7	100,6	2,0	2,0	716,0	1140,0	D	2641
85	121,400	70,0	100,0	60,0	1,1/5,5	1,1/5,5	369,0	638,0	A	2633
85	121,400	70,0	100,0	60,0	4,9	1,1	369,0	638,0	A	2899
85	121,440	60,0	100,0	49,0	4,0	1,0	297,2	483,4	A	2682
85	121,440	68,0	99,6	56,0	5,5	2,0	322,0	535,0	A	2815
90	130,110	72,0	106,8	58,7	5,0	1,5	346,0	573,0	A	2734
95	155,870	150,0	120,6	118,6	2,0	2,0	832,0	1426,0	D	2642 - 2867
100	139,650	67,0	116,2	52,0	5,0	1,1	420,0	628,0	A	2814
100	139,650	67,0	116,2	52,2	5,0	1,1	420,0	628,0	B	2887



LAST UPDATE: 2020

[illegible]



Technical drawing of a cross-section of a mechanical component. The drawing shows a central vertical shaft with a cross-hatched section at the top and bottom. The shaft is surrounded by a housing. Dimensions are indicated as follows:

- X : Horizontal distance from the centerline to the right edge of the housing.
- J : Vertical distance from the centerline to the top edge of the housing.
- d : Vertical distance from the centerline to the bottom edge of the housing.
- b : Horizontal distance from the centerline to the right edge of the shaft.
- B : Total horizontal width of the component.

[illegible]